



- The TFP-HTW pump is the most used pump for torque operations and provide the power for your torque.
- The hydraulic pump is available in electric or pneumatic version, with different 2-Stage delivery.
- The transport cage guarantee all around protection and easy handling.
- For this model are available different accessories: the heater exchanger, the quad block, the automatic cycle, quick couplers and twin hoses.
- This pump model can moreover be totally personalized:
- ATEX
- hour counter
- different cages
- timer
- multiple switches
- different tanks
- different tension and frequency



ELECTRIC



PNEUMATIC

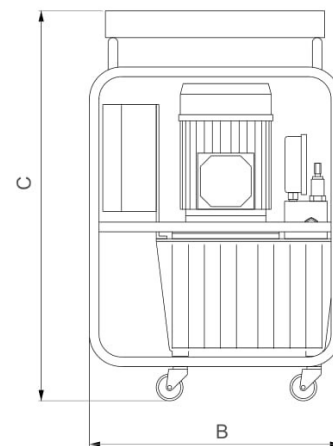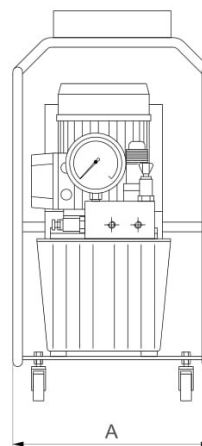

Features:

Hydraulic Pump With Three-phase Electric Motor

ATEX Certified Version Ce Ex II 2 G K T3

ATEX Zone-2 Class T3 Gas Group IIA

OPTIONS	
SC	EXCHANGER
Q	QUAD BLOCK
AC	AUTO CYCLING
T	TIMER
HC	COUNTER HOUR

MODEL	PRESSURE	OIL FLOW	MOTOR	VOLTAGE / FREQUENCY	POWER/ RPM	TANK CAPACITY	DIMENSION			WEIGHT
	1/2 STAGE						A	B	C	
	bar	l/min			kw/rpm	Ltr.				kg
TFP-1P	80/700	7,2/0,9	SINGLE-PHASE	230V-50Hz	1,5/2850	10	350	460	610	38
TFP-3P	80/700	7,2/0,9	THREE-PHASE	400V-50Hz	1,1/2850	10	350	460	610	37
TFP-AIR	80/700	7,9/0,9	PNEUMATIC	-	1,3/3000	10	350	460	610	33